


HX-EP SERIES

DIGITAL OUTPUT

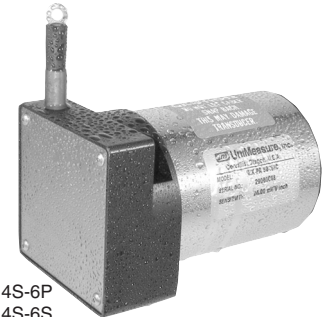

Utilizing an incremental encoder as the sensor, the UniMeasure HX-EP series position transducer provides a two channel square wave current sinking output signal in quadrature. The standard output is a single-ended TTL compatible square wave with 2KΩ pullup resistors provided internally. The resolution values shown in the specifications table indicate resolution for times 1 counting mode where a count is registered for one up transition in channel A. With interface electronics capable of times 2 or times 4 counting mode, a true resolutional increase of 2 or 4 may be obtained. For example, the HX-EP-50 has a resolution of approximately .004" per count in times 1 counting mode whereas the resolution is approximately .001" per count in times 4 counting mode. The actual resolution of a HX-EP transducer differs from unit to unit because of tolerances associated with the wire rope diameter and the capstan upon which the wire rope winds. The nylon jacketed wire rope option will have the effect of slightly reducing the resolution. Linearity and repeatability remain independent of resolution. In applications where the output count is interpreted as a percentage of total travel, resolutional differences from unit to unit are not critical. However, in applications where the digital output is to be interfaced to a digital display to give an output in engineering units, the calibration constant supplied with the transducer may be used to calculate a suitable scale multiplier to produce the correct engineering units. Alternative outputs shown in the Electrical Outputs table below are available to facilitate interfacing to a variety of different types of equipment.

1. The resolution shown is a calculated number based upon the capstan diameter, wire rope diameter and line count of the encoding device. The tolerance on the resolution accounts for resolutional differences from unit to unit due to manufacturing tolerances on the capstan and wire rope. In practice, the output count in a given unit of travel is an integer.

SPECIFICATIONS

General

Connector MS3102E-14S-6P
 Mating Connector (included)..... MS3106E-14S-6S
 Available Measurement Ranges See Table 12, Page 34

Performance

Linearity ±0.03% Full Scale
 Repeatability ±0.015% Full Scale
 Resolution See Table 9

Electrical

Input Voltage..... +5 VDC ±5%
 Input Current..... 125 mA Maximum
 Output Current sinking (20 mA max.)
 two channel single-ended TTL square wave from LM339 open collector output stage. 2 KΩ internal pullup resistors provided.
 Phase Quadrature 90°±20°

Environmental

Operating temperature..... 0°C to 70°C
 Storage temperature..... -25°C to 90°C
 Shock..... 50 G's for 11 ms Duration
 Vibration..... 20 Hz to 2000 Hz @ 5G's
 Humidity..... 100%
 Ingress Protection
 Exclusive of Wire Rope Area NEMA 4 (IP-65)
 Optional Ingress Protection NEMA 6 (IP-68)


TABLE 9—RESOLUTION

MODEL	RANGE		RESOLUTION ¹		TOLERANCE ¹ ON RESOLUTION
	(inch)	(mm)	(counts/inch)	(counts/mm)	
HX-EP-10	10	250	500.0	19.69	±0.30%
HX-EP-25	25	640	250.0	9.84	±0.20%
HX-EP-50	50	1250	250.0	9.84	±0.20%
HX-EP-60	60	1.5 m	205.8	8.10	±0.20%
HX-EP-80	80	2.0 m	155.2	6.11	±0.20%
HX-EP-100	100	2.5 m	82.9	3.26	±0.20%
ALL RANGES GREATER THAN 100"	100	2.5 m	82.9	3.26	±0.20%

Range
 Select measurement range from Table 12, Page 34. Insert corresponding Measurement Range Designator

Wire Rope
 * Stainless Steel (See Table 12, Page)
NJC Ø.018 (0,45 mm) Nylon Jacketed Stainless Steel (Ranges to 80" only)
NJC037 . Ø.037 (0,94 mm) Nylon Jacketed Stainless Steel (Ranges 100" and greater only)

Wire Rope Tension
 * Standard
004 Reduced (Ranges to 50" only)

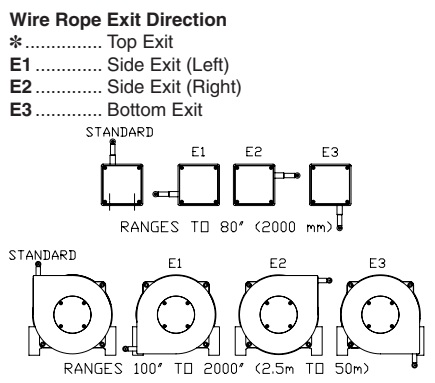

Housing
 * NEMA 4 (IP-65) Aluminum
N6 NEMA 6 (IP-68) Aluminum
SS NEMA 6 (IP-68) Corrosion Resistant Stainless Steel and Non-Metallic Construction

Electrical Interface
 * Mating Connector Included (See note 1 below)
L3M 3 m (10') electrical cable (See note 2 below)
L4M 4 m (13.5') electrical cable (See note 2 below)
L5M 5 m (16.5') electrical cable (See note 2 below)
L6M 6 m (20') electrical cable (See note 2 below)
L7M 7 m (23') electrical cable (See note 2 below)
 1. Applies to NEMA 4 Housing option only. Does not apply to N6 or SS Housing options.
 2. Select one of options L3M through L7M when electrical cable is required with mating connector when Housing option NEMA 4 is also selected. Select one of options L3M through L7M when Housing option N6 or SS is selected. Connector is **not** available with Housing option N6 or SS.

Electrical Output (See Page _ for output stage configuration)
 * Standard 2 channel 5 VDC, TTL
I 2 channel 5 VDC, TTL with Index
H1 8 to 28 VDC Current Sinking
H11 8 to 28 VDC Current Sinking with Index
H2 5 VDC differential line drive current sinking
H21 5 VDC differential line drive current sinking with index
H3 8 to 28 VDC Differential Line Drive Current Sinking
H31 8 to 28 VDC Differential Line Drive Current Sinking with Index
H5 5 VDC Push Pull
H51 5 VDC Push Pull with Index


Note: H11, H21, H31 and H51 options are only available with NEMA 4 (IP-65) housing configuration with connector and mating connector.

NOTE
 1) *—Asterisk items are standard configuration. No option designator is required.
 2) Shaded options available at additional cost.
 3) See Page 35 for a description of options

Example
HX-EP-50-NJC-H1

HX

MECHANICAL SPECIFICATIONS

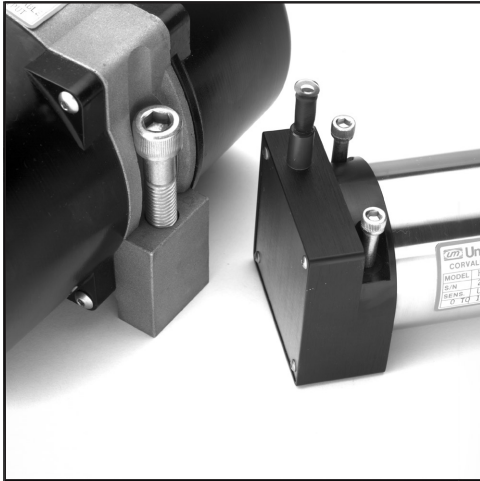

Typical HX mounting bolts.

SPECIFICATIONS

Mechanical Specifications

- Available Measurement Ranges..... See Table 12
- Construction
 - Ranges 80" (2 m) and under Anodized Aluminum Mounting Base, Stainless Steel & Anodized Aluminum Housing
 - Ranges 100" (2.5 m) and greater Stainless Steel Mounting Base High Impact, Corrosion Resistant Polyurethane Housings
- Wire Rope Tension See Table 12
- Wire Rope Diameter..... See Table 12
- Weight See Table 12
- Connector..... MS3102A-14S-6P
- Mating Connector (included) MS3106E-14S-6S
- Optional NEMA 6 Capability Bulkhead fitting with shielded, twisted pair cable

TABLE 12

Use value from this column to indicate overall measurement range

Check mark indicates available measurement range





MEASUREMENT RANGE DESIGNATOR	STANDARD MEASUREMENT RANGES		APPLICABLE SERIES			WIRE ROPE TENSION (NOMINAL)		WIRE ROPE DIAMETER		WEIGHT	
	(in)	(mm)	HX-PA HX-PB HX-P420 HX-P510 HX-P1010	HX-EP	HX-V HX-VP	(oz)	(N)	(in)	(mm)	(lb)	(Kg)
2	2	50	✓	-	✓	34	9.4	.016	0.4	2	0.9
3	3	75	✓	-	✓	24	6.7	.016	0.4	2	0.9
4	4	100	✓	-	✓	24	6.7	.016	0.4	2	0.9
5	5	125	✓	-	✓	19	5.3	.016	0.4	2	0.9
6	6	150	✓	-	✓	24	6.7	.016	0.4	2	0.9
10	10	250	✓	✓	✓	34	9.4	.016	0.4	2	0.9
15	15	390	✓	-	✓	24	6.7	.016	0.4	2	0.9
20	20	500	✓	-	✓	24	6.7	.016	0.4	2	0.9
25	25	640	✓	✓	✓	19	5.3	.016	0.4	2	0.9
30	30	750	✓	-	✓	24	6.7	.016	0.4	2	0.9
40	40	1000	✓	-	✓	24	6.7	.016	0.4	2	0.9
50	50	1250	✓	✓	✓	19	5.3	.016	0.4	2	0.9
60	60	1500	✓	✓	✓	24	6.7	.016	0.4	2	0.9
80	80	2.0m	✓	✓	✓	21	5.8	.016	0.4	2	0.9
100	100	2.5m	✓	✓	✓	36	10.0	.024	0.6	6.8	3.1
120	120	3.0m	✓	✓	✓	36	10.0	.024	0.6	6.8	3.1
150	150	3.8m	✓	✓	✓	36	10.0	.024	0.6	6.8	3.1
200	200	5.0m	✓	✓	✓	36	10.0	.024	0.6	6.8	3.1
250	250	6.3m	✓	✓	✓	36	10.0	.024	0.6	6.8	3.1
300	300	7.5m	✓	✓	✓	36	10.0	.024	0.6	6.8	3.1
350	350	8.8m	✓	✓	✓	36	10.0	.024	0.6	6.8	3.1
400	400	10.0m	✓	✓	✓	36	10.0	.024	0.6	6.8	3.1
500	500	12.5m	✓	✓	✓	36	10.0	.024	0.6	8.6	3.9
600	600	15.2m	✓	✓	✓	36	10.0	.024	0.6	8.6	3.9
800	800	20.3m	✓	✓	✓	36	10.0	.024	0.6	8.6	3.9
1000	1000	25.4m	✓	✓	-	36	10.0	.024	0.6	12.0	5.4
1200	1200	30.4m	✓	✓	-	36	10.0	.024	0.6	12.3	5.6
1600	1600	40.6m	✓	✓	-	36	10.0	.024	0.6	14.1	6.4
1800	1800	45.7m	✓	✓	-	36	10.0	.021	0.6	15.9	7.2
2000	2000	50.8m	✓	✓	-	36	10.0	.021	0.5	16.3	7.4



Specifications subject to change without notice.


HX

OPTION DESCRIPTION

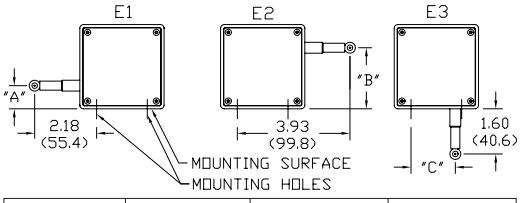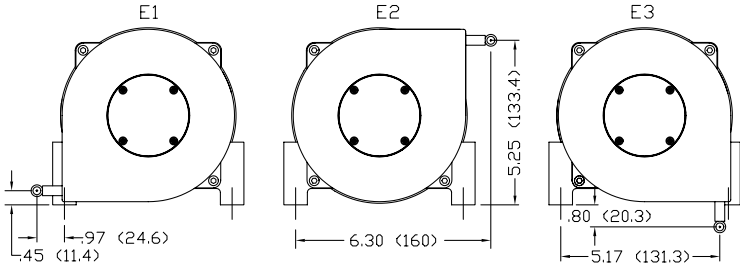OPTION	OPTION DESIGNATOR	DESCRIPTION																												
Nylon jacketed wire rope (Ranges to 80" only)	NJC	Replaces standard stainless steel wire rope with Ø.018 nylon jacketed wire rope. This option increases wire rope life dramatically but may increase non-linearity by as much as ±.05% of full scale.																												
Nylon jacketed wire rope (Ranges 100" to 500" only)	NJC037	Replaces standard stainless steel wire rope with Ø.037 nylon jacketed wire rope.																												
Reversed output	R	Output is at a maximum when wire rope is fully retracted. Output decreases as wire rope is extended. Does not apply to velocity signal.																												
NEMA 6, IP-68 capability	N6	 <p>Connector is replaced with a bulkhead fitting and a designated length of urethane jacketed, shielded, twisted pair cable. Retraction mechanism and electrical components are sealed to NEMA 6, IP-68 capability. No connector.</p>																												
Stainless steel construction (Ranges to 80" only)	SS	<p>All external anodized aluminum parts of transducer are replaced with stainless steel and corrosion resistant plastic. Transducer is sealed to NEMA 6, IP-68 capability. Urethane jacketed, shielded, twisted pair cable exits unit. No connector.</p> 																												
Non-standard potentiometer (Applies to HX-PA only)	PXK	<p>Replace "X" in option designator with required potentiometer value in K ohms. Non-standard potentiometer linearity is as follows:</p> <p>Ranges 0 to 2" to 0 to 5" ±1.00% of full scale Ranges 0 to 10" to 0 to 25" ±0.50% of full scale Ranges 30" and above ±0.25% of full scale</p> <p>Note: This option is subject to potentiometer availability.</p>																												
Alternate wire rope exit Measurement ranges to 80" (2.0 m)	E1, E2, E3	 <table border="1" data-bbox="654 1476 1174 1696"> <thead> <tr> <th>RANGE</th> <th>"A"</th> <th>"B"</th> <th>"C"</th> </tr> </thead> <tbody> <tr> <td>2", 10"</td> <td>1.12 (28.4)</td> <td>1.79 (45.5)</td> <td>1.21 (30.7)</td> </tr> <tr> <td>3", 15", 30"</td> <td>.96(24.4)</td> <td>1.95 (49.5)</td> <td>1.37 (34.8)</td> </tr> <tr> <td>4", 20", 40"</td> <td>.80 (20.3)</td> <td>2.11 (53.6)</td> <td>1.53 (38.9)</td> </tr> <tr> <td>5", 25", 50"</td> <td>.64 (16.3)</td> <td>2.27 (57.7)</td> <td>1.69 (42.9)</td> </tr> <tr> <td>60"</td> <td>.49 (12.4)</td> <td>2.42 (61.5)</td> <td>1.84 (46.7)</td> </tr> <tr> <td>80"</td> <td>.25 (6.4)</td> <td>2.66 (67.6)</td> <td>2.08 (52.8)</td> </tr> </tbody> </table> <p>Dimensions in brackets are millimeters.</p>	RANGE	"A"	"B"	"C"	2", 10"	1.12 (28.4)	1.79 (45.5)	1.21 (30.7)	3", 15", 30"	.96(24.4)	1.95 (49.5)	1.37 (34.8)	4", 20", 40"	.80 (20.3)	2.11 (53.6)	1.53 (38.9)	5", 25", 50"	.64 (16.3)	2.27 (57.7)	1.69 (42.9)	60"	.49 (12.4)	2.42 (61.5)	1.84 (46.7)	80"	.25 (6.4)	2.66 (67.6)	2.08 (52.8)
RANGE	"A"	"B"	"C"																											
2", 10"	1.12 (28.4)	1.79 (45.5)	1.21 (30.7)																											
3", 15", 30"	.96(24.4)	1.95 (49.5)	1.37 (34.8)																											
4", 20", 40"	.80 (20.3)	2.11 (53.6)	1.53 (38.9)																											
5", 25", 50"	.64 (16.3)	2.27 (57.7)	1.69 (42.9)																											
60"	.49 (12.4)	2.42 (61.5)	1.84 (46.7)																											
80"	.25 (6.4)	2.66 (67.6)	2.08 (52.8)																											
Alternate wire rope exit Measurement ranges 100" (2.5 m) and greater.	E1, E2, E3	 <p>Dimensions in brackets are millimeters.</p>																												

HX

DIMENSIONAL INFORMATION

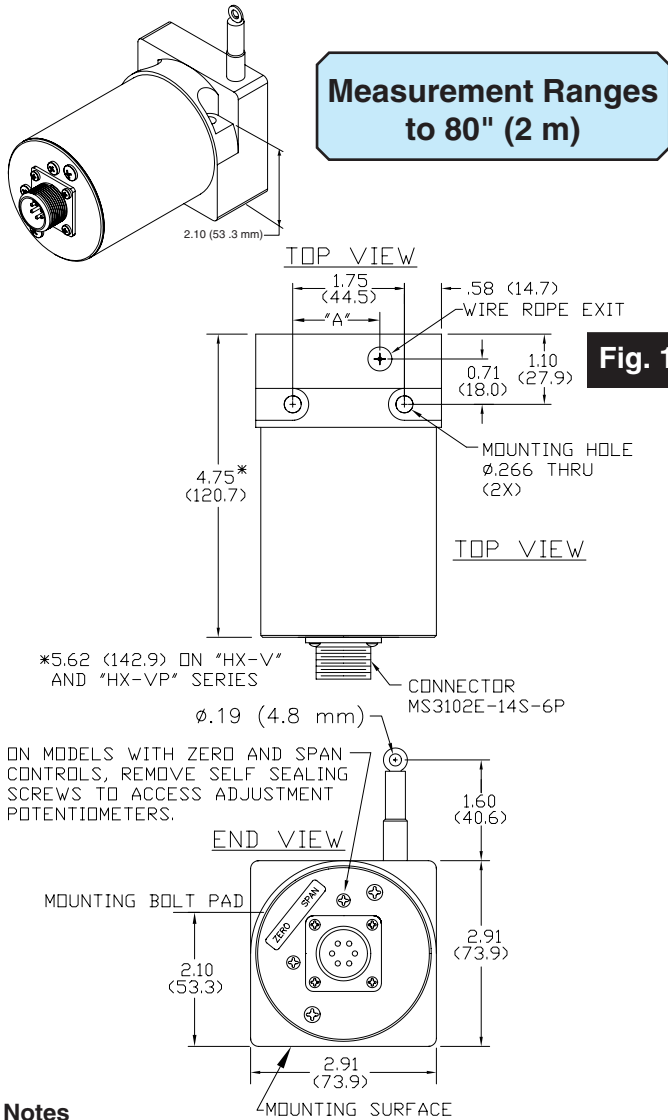

Notes

1. Transducer mounts with Ø.25 or M6 socket head cap bolts.

Table 13

RANGE	"A"
2", 10"	1.21 (30.7)
3", 15", 30"	1.37 (34.8)
4", 20", 40"	1.53 (38.9)
5", 25", 50"	1.69 (42.9)
60"	1.84 (46.7)
80"	2.08 (52.8)


Table 14

RANGE	DIM "A"	DIM "B"
Ranges to 800"	7.70 (19.6)	3.80 (96.5)
1000" to 2000"	11.0 (280.0)	5.60 (142.0)

Notes

1. Transducer mounts with Ø.50 or M12 socket head cap bolts.
 2. Dimension "C" is the cable offset that occurs as the cable is extended from the transducer.

For "C" in inches, $C = .0016 \times E$ where E = extension in inches.
 For "C" in millimeters, $C = .0016 \times E$ where E = extension in mm.

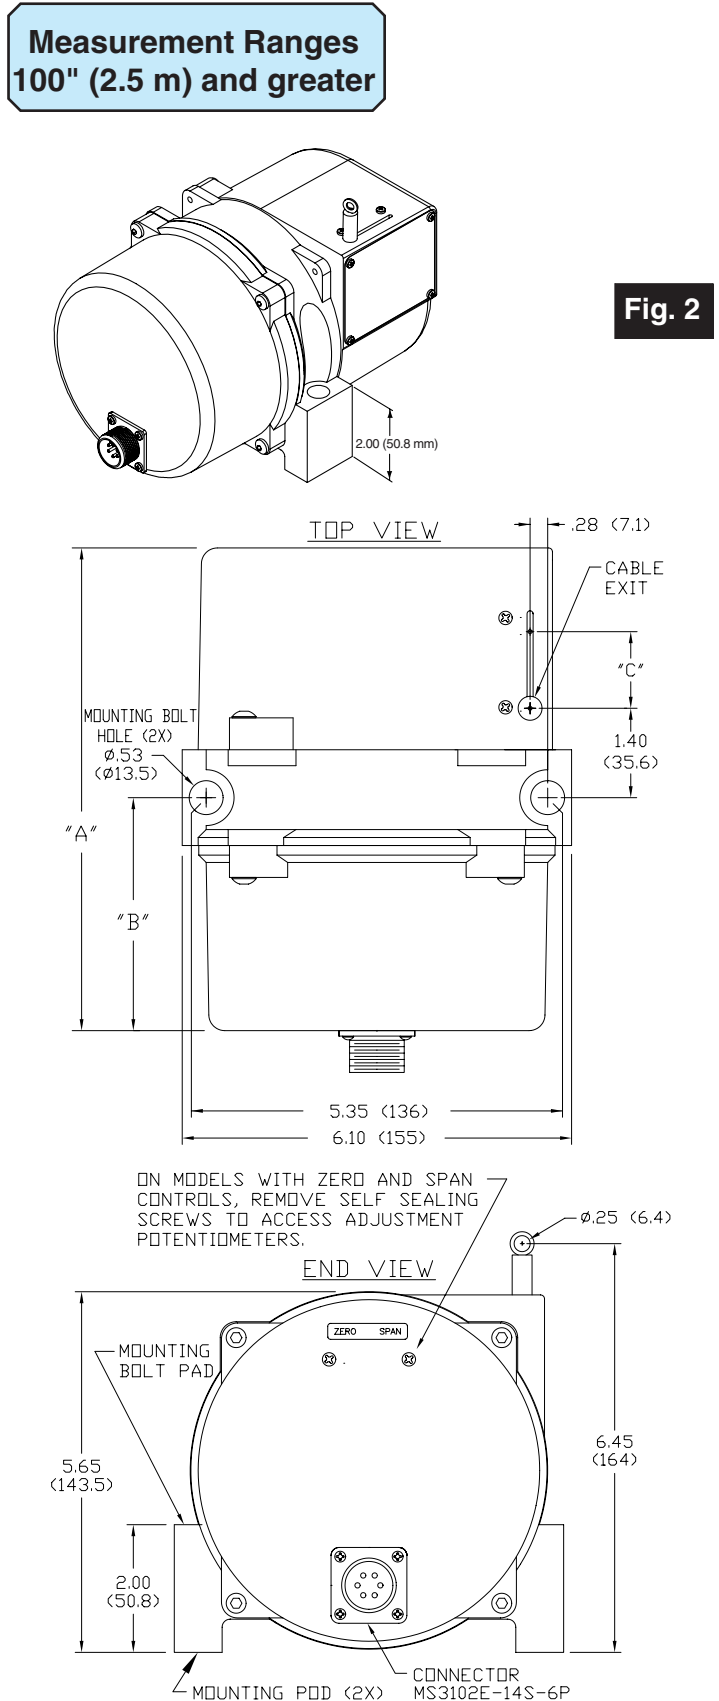

Dimensions in brackets are millimeters.

Specifications subject to change without notice.